


> axr8

Excellent resistance to solvents and to high temperature
Excellent resistance to smudge and scratch
Excellent printing quality


AXR®8 is a high performance resin ribbon designed for the most demanding applications regarding resistance to mechanical aggressions and/or temperature and/or solvents. It is fully compatible with the label materials dedicated to the same high performance applications.

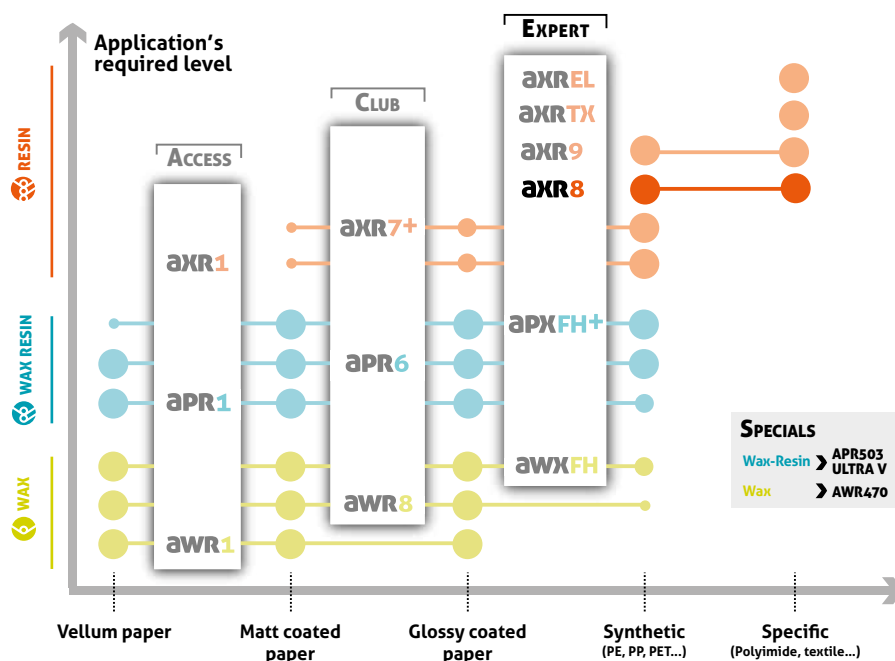


Printing receptor

synthetics		specific	
PP	● ● ●	Polyimide	● ● ●
PE	● ● ●	Acrylate	● ● ●
PET	● ● ●		

Printer settings

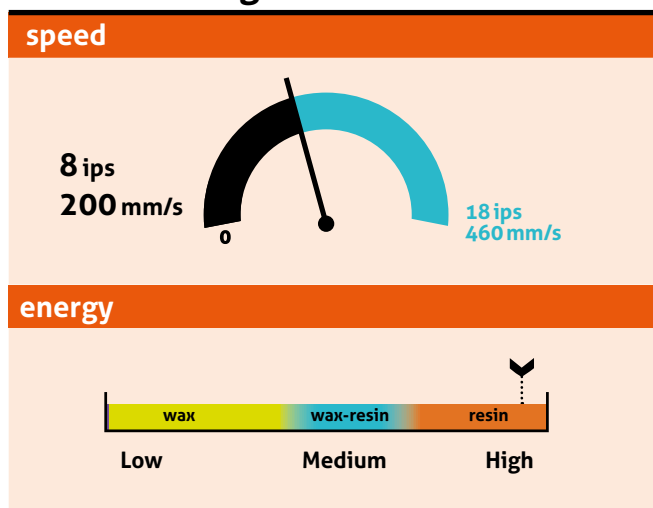

Print resistance

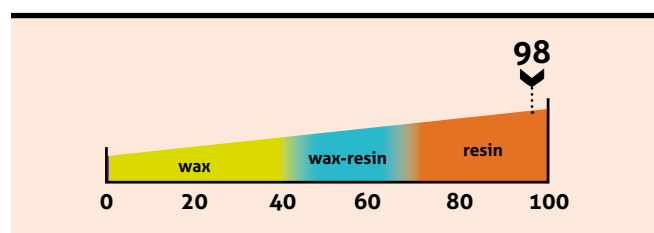

Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65
UL 969

Your ribbon identity

Colours: ●
Length (m):
Width (mm):
Part number:
Your distributor:
Contact :

axr8

Application fields



Product performance

print quality			
90°Barcode		A _a Small characters	
0°Barcode		2D Barcode	
		Logos	
		Blackness	
technical resistances			
Heat		Light/Blue Wool	
Water/Submerge		Rubbing	
		Solvents	
		Rubtester: 939g, no damage after ... cycles :	
		IPA: 200 Ethanol: 80	
		Mineral Spirit: 80 Unleaded gasoline 98: 10	
		Motor oil: 250 Brake fluid: 10	

Product physico-chemical features

product structure			
		PET film	Thickness: 4,5 µm
		Ink	Resin
		Melting point	85°C/185°F
		Backcoating	Silicon based
		Coefficient of Friction	Kd < 0.2
		Ribbon thickness	< 9 µm
The ribbon is anti static build-up treated			

Storage

storage conditions
12 months recommended
20-80 % Humidity Rate, 5-35°C (40-95°F)

Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.